

**Gibson Abrasive Equipment**  
**904 S. Hamilton St.**  
**Sheridan, IN 46069**


**Phone: 888-867-1619**  
**Fax: 317-758-6775**  
**Email: ggibson@gibson-equipment.com**

## Model 60" Table, Table Blast System

### Gibson Table Blasters

- Versatile, rugged systems that deliver consistent, repeatable results
- Easy to install, simple to operate

Gibson Table Blasters process parts weighing up to 10,000 pounds with diameters up to eight feet and heights exceeding four. Featuring eleven standard models, Gibson's

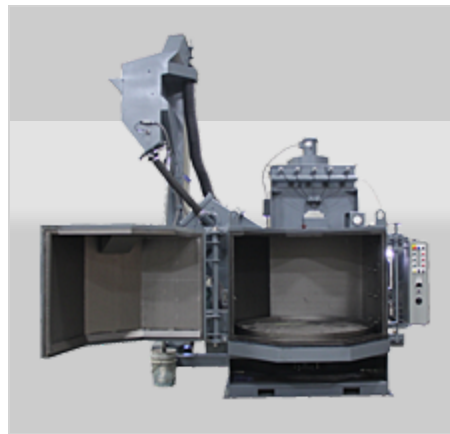

+ more

### Specifications | Capabilities

#### Specifications

<b>Work Load Capacity</b>	5,000 lb
<b>Maximum Blast Envelope Capacity</b>	60 in Dia. x 37 in
<b>Optimal Blast Envelope Capacity</b>	48 in Dia. x 30 in
<b>Media Charge Capacity (Steel)</b>	2000 lb
<b>Table Blaster Height, Cabinet Only</b>	160 in
<b>Table Blaster Width, Cabinet Only</b>	105 in
<b>Table Blaster Depth, Cabinet Only</b>	84 in
<b>Dust Collector Height</b>	127 in
<b>Dust Collector Width</b>	50 in
<b>Dust Collector Depth</b>	36 in

<b>Direct-Drive Blast Wheel</b>	20 hp
<b>Direct-Drive Blast Wheel - Optional Wheels</b>	(2) 10 hp (2) 7.5 hp
<b>Ventilation Requirement</b>	2,000 CFM
<b>Electrical Requirement - Current (Table Blaster Only)</b>	26.8 A
<b>Electrical Requirement - Current (with Dust Collector)</b>	33.0 A
<b>Electrical Requirement - Voltage</b>	460 V
<b>Electrical Requirement - Frequency</b>	60 Hz
<b>Electrical Requirement - Phase</b>	3

## Capabilities

### Features

- Solid construction
- Safety Interlock
- 20 HP direct drive blast wheel
- 60" x 31.5" Optimal Blast Area
- 5000 # Table Capacity
- Ease of operation
- Low noise level
- Low initial investment
- Superior parts cleaning
- Air wash separator
- Dial cycle timer

### Blast Cleaning Solutions for:

- Ferrous and non-ferrous castings
- Heat treated parts
- Automotive parts
- Die Castings
- Deflashing plastic
- Descaling
- Peening
- Deburring

### Available Options

- Variable speed motors
- Rotary Screen
- Dust collector